



HSF

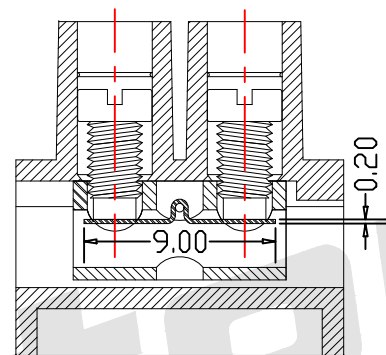

RoHS

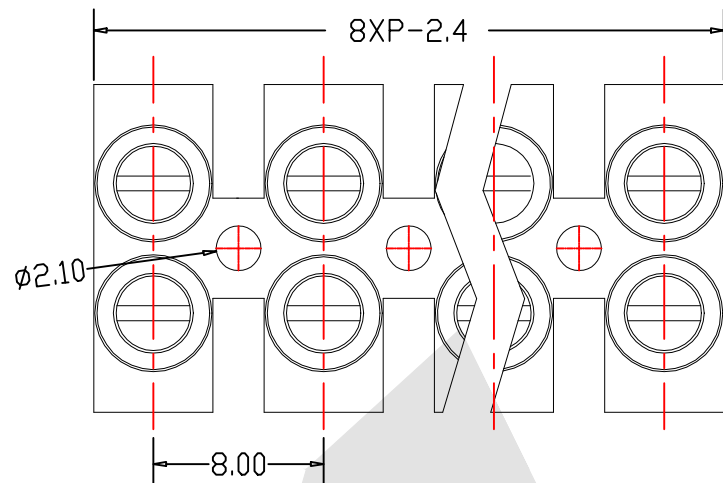

With Wire Cage
Type2

SPECIFICATION

Voltage Rating (额定电压): 300V
Current Rating (额定电流): 15A
Wire range (使用线径): 20-14AWG 1.5mm²
Housing (塑件): PA66+23%GF, UL94V-0
Solder Pin (接触材料): Brass, Nickel Plated (黄铜, 镀锡)
Screw (螺丝): M3.0 Steel, Zinc Plated (钢, 镀锌)
Torque (扭矩): 0.5N.m

Ordering Code:



AT800 -8.0 - XX - T - X - A

Pitch: 02: 2 Contacts
8.0: 8.0mm 03: 3 Contacts
... ..
12: 12 Contacts

Insulator color:
T: Transparent
A: Green
B: Blue
C: Black
G: Gray
O: Orange

Option
A: Type1
B: Type2


A: Series number

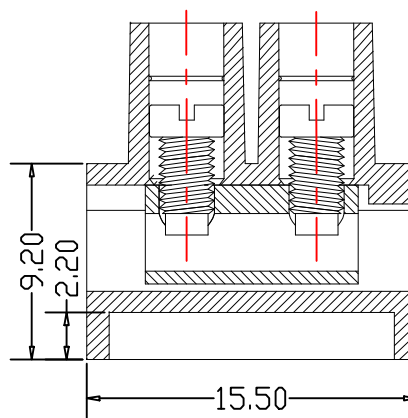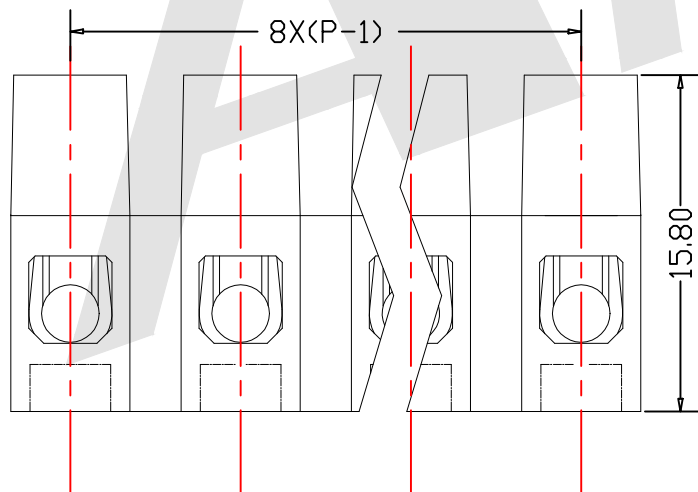

W/O Wire Cage
Type1

Unless Otherwise specified tolerance
X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown UNIT: mm
DRAW Wu Sai DATE 22/03/2018
CHECK BobYang DATE 22/03/2018



ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail: sales@antenk.com

TITLE:
Feed Through Terminal Block Pitch: 8.0 mm

DRAWING NO: AT800-8.0XXXX-A

PRODUCT NO: AT800-8.0XXXX-A

REV

DESCRIPTION

DATE

1

2

3

4

5

6

7

8